




- Magnetic Drilling Machine
- Broach Cutters • TCT Hole Saw

www.schifler.de



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 32

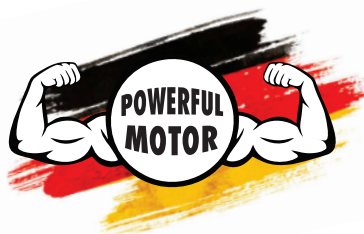

A to Z

SPARE SUPPORT



SPECIFICATIONS

Motor power	1100 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø35 mm
Broach cutter(50 mm length)	Ø12 mm - Ø35 mm
RPM	450 min-1
Magnet power	10000 N
Input supply voltage	220V-240V
Frequency	50Hz-60Hz
Price M.R.P.	₹ 27,000

STANDARD ACCESSORIES



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 50 MAX



A to Z


SPARE SUPPORT



SPECIFICATIONS

Motor power	1150 watt
Spindle	MT2, 19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø50mm
Broach cutter(50 mm length)	Ø12 mm - Ø50 mm
Twist Drill	Ø18 mm
RPM	n250 min ⁻¹ -n450 min ⁻¹
Magnet power	11000 N
Input supply voltage	220v-240v
Frequency	50Hz-60Hz
Price M.R.P.	₹ 70,500

STANDARD ACCESSORIES



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 35H



SPECIFICATIONS

Motor power	1100 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø35 mm
Broach cutter(50 mm length)	Ø12 mm - Ø35 mm
RPM	450 min-1
Weight	9.5 kg
Magnet power	110000 N
Input supply voltage	220V - 240V
Price M.R.P.	₹ 72,500

STANDARD ACCESSORIES



Allen Key 2.5, 4, 6 Pilot Pin 6x50, 8x50 Safety Belt



SWC 40




Twist Drilling Ø13 mm

SPECIFICATIONS

Motor power	1150 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø40 mm
Broach cutter(50 mm length)	Ø12 mm - Ø40 mm
Broach cutter (80 mm length)	Ø18 mm - Ø22 mm
Broach cutter (100 mm length)	-
Tapping	-
Twist drill	Upto Ø13 mm
Counter Sinking	Ø40 mm
RPM	450 min-1
Flexible Stroke upto	240 mm
Weight	12 kg (26,8 lbs)
Magnet power	10000 N
Input supply voltage	220V - 240V
Price M.R.P.	₹ 55,500

STANDARD ACCESSORIES



Drill Chuck Adaptor Allen Key 2.5, 4, 6 Pilot Pin 6x50, 8x50 Safety Belt




Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 65



Twist Drilling Ø23 mm

STANDARD ACCESSORIES



SPECIFICATIONS

Motor power	1600 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø65 mm
Broach cutter (50 mm length)	Ø12 mm - Ø65 mm
Broach cutter (80 mm length)	Ø12 mm - Ø65 mm
Broach cutter (100 mm length)	-
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min-1/450 min-1
Flexible Stroke upto	205 mm
Weight	16 kg (59.5 lbs)
Magnet power	18000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz
Price M.R.P.	₹ 95,500



SWC 65 WT



Twist Drilling Ø23 mm

STANDARD ACCESSORIES



SPECIFICATIONS


Motor power	1600 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø65 mm
Broach cutter (50 mm length)	Ø12 mm - Ø65 mm
Broach cutter (80 mm length)	Ø12 mm - Ø65 mm
Tapping	M6-M20
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min-1/450 min-1
Stroke	Flexible Stroke upto 205 mm
Weight	16 kg (59.5 lbs)
Magnet power	18000 N
Input supply voltage/Frequency	220V - 240V / 50Hz-60Hz
Electro Torque Control	Yes
Price M.R.P.	₹ 1,05,500



SWC 65 WT SB (Swivel Base)



STANDARD ACCESSORIES



SPECIFICATIONS

Motor power	1600 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø65 mm
Broach cutter (50 mm length)	Ø12 mm - Ø65 mm
Broach cutter (80 mm length)	Ø12 mm - Ø65 mm
Tapping	M6-M20
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min-1/450 min-1
Stroke	Flexible Stroke upto 205 mm
Weight	16 kg (59.5 lbs)
Magnet power	18000 N
Input supply voltage/Frequency	220V - 240V / 50Hz-60Hz
Electro Torque Control	Yes
Price M.R.P.	₹ 1,15,500




Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 80



Twist Drilling Ø32 mm

STANDARD ACCESSORIES



SPECIFICATIONS

Motor power	1700 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø80 mm
Broach cutter(50 mm length)	Ø12 mm - Ø80 mm
Broach cutter (80 mm length)	Ø18 mm - Ø80 mm
Tapping	-
Twist drill	Ø32mm
Counter Sinking	Ø100 mm
RPM	n 110 min ⁻¹ - n 175 min ⁻¹ / n 385 min ⁻¹ - n 425 min ⁻¹
Weight	21 kg
Magnet power	15000 N
Input supply voltage/Frequency	220V - 240V / 50Hz-60Hz
Price M.R.P.	₹ 1,30,000




SWC 80 WT



Twist Drilling Ø32 mm

STANDARD ACCESSORIES



SPECIFICATIONS

Motor power	1700 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø80 mm
Broach cutter(50 mm length)	Ø12 mm - Ø80 mm
Broach cutter (80 mm length)	Ø18 mm - Ø80 mm
Tapping	M20
Twist drill	Ø32mm
Counter Sinking	Ø100 mm
RPM	n 110 min ⁻¹ - n 175 min ⁻¹ / n 385 min ⁻¹ - n 425 min ⁻¹
Weight	21 kg
Magnet power	15000 N
Input supply voltage/Frequency	220V - 240V / 50Hz-60Hz
Price M.R.P.	₹ 1,50,000



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine

SWC 100


SPECIFICATIONS

Motor power	1800 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø100 mm
Broach cutter(50 mm length)	Ø12 mm - Ø100 mm
Broach cutter (80 mm length)	Ø18 mm - Ø100 mm
Broach cutter (100 mm length)	Ø18 mm - Ø100 mm
Tapping	-
Twist drill	Ø32mm
Counter Sinking	Ø80 mm
RPM	n 40 min ⁻¹ - n 65 min ⁻¹ / n 140 min ⁻¹ - n 220 min ⁻¹
Weight	28 kg
Magnet power	20000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz
Price M.R.P.	₹ 1,60,000



Twist Drilling Ø32 mm

STANDARD ACCESSORIES



SWC 100 WT


SPECIFICATIONS

Motor power	1800 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø100 mm
Broach cutter(50 mm length)	Ø12 mm - Ø100 mm
Broach cutter (80 mm length)	Ø18 mm - Ø100 mm
Broach cutter (100 mm length)	Ø18 mm - Ø100 mm
Tapping	M30
Twist drill	Ø32mm
Counter Sinking	Ø80 mm
RPM	n 40 min ⁻¹ - n 65 min ⁻¹ / n 140 min ⁻¹ - n 220 min ⁻¹
Weight	28 kg
Magnet power	20000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz
Price M.R.P.	₹ 1,80,000



Twist Drilling Ø32 mm

STANDARD ACCESSORIES



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine


SWC 35 AT



SPECIFICATIONS

Motor power	1150 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø35 mm
Broach cutter(50 mm length)	Ø12 mm - Ø35 mm
RPM	450 min-1
Weight	15 kg
Magnet power	10000 N
Input supply voltage	220 V - 240 V
Electro Torque Control	Yes
Frequency	50Hz-60Hz
Price	₹ 1,22,500

STANDARD ACCESSORIES



SWC 120 WT



Twist Drilling Ø45 mm

SPECIFICATIONS

Motor power	2500 watt
Spindle	MK-4
Broach cutter (35 mm length)	Ø12 mm - Ø120 mm
Broach cutter (50 mm length)	Ø12 mm - Ø120 mm
Broach cutter (80/100 mm length)	Ø18 mm - Ø120 mm
Twist drill	Ø45 mm
Counter Sinking	Ø80 mm
Tapping	M6-M38
Reaming	Ø50 mm
Counter sinking	Ø80 mm
RPM	80-125min-1/ 175-300 min-1
Weight	35 kg
Input supply voltage /Frequency	220V-240V / 50Hz-60Hz
Electro Torque Control	Yes
Price	₹ 1,83,500

STANDARD ACCESSORIES



Magnet-Kernbohrmaschinen Magnetic Core Drilling Machine



SWC 35 PD

SPECIFICATIONS

Motor power	1100 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø35 mm
Broach cutter(50 mm length)	Ø12 mm - Ø35 mm
Twist drill	Upto Ø13 mm
Counter Sinking	Ø40 mm
RPM	450 min-1
Smallest Pipe Diameter	80 mm (3.3/16")
Weight	12 kg (26,8 lbs)
Magnet power	532 Kg.
Input supply voltage	220 V - 240 V
Frequency	50Hz-60 Hz
Price	₹ 1,22,500



*SWC 35 PD machine can be used with both Broach Cutters & Hole Saws

STANDARD ACCESSORIES



SWC 50 PD

SPECIFICATIONS

Motor power	1500 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø50 mm
Broach cutter(50 mm length)	Ø12 mm - Ø50 mm
Broach cutter(80 mm length)	Ø18 mm - Ø26 mm
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min ⁻¹ / 450 min ⁻¹
Flexible Stroke upto	205 mm
Smallest Pipe Diameter	80 mm (3.3/16")
Weight	16 kg
Magnet power	860 Kg.
Input supply voltage/Frequency	220 V - 240 V / 50Hz-60 Hz
Price	₹ 1,52,500



*SWC 50 PD machine can be used with both Broach Cutters & Hole Saws

STANDARD ACCESSORIES



SWC 50 PDT


SPECIFICATIONS

Motor power	1500 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø50 mm
Broach cutter (50 mm length)	Ø12 mm - Ø50 mm
Broach cutter (80 mm length)	Ø18 mm - Ø26 mm
Tapping	M6-M20
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min-1/450 min-1
Stroke	Flexible Stroke upto 205 mm
Smallest Pipe Diameter	80 mm (3.3/16")
Weight	16 kg (59.5 lbs)
Magnet power	15000 N
Input supply voltage/Frequency	220 V - 240 V / 50Hz-60Hz
Price	₹ 1,62,500



*SWC 50 PDT machine can be used with both Broach Cutters & Hole Saws

STANDARD ACCESSORIES



Kernbohrer HSS

Core Drills HSS



Schnitttiefe / Cutting Depth 35mm

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
12,0	35	1851
13,0	35	1851
14,0	35	1875
15,0	35	1875
16,0	35	1951
17,0	35	1951
18,0	35	2051
19,0	35	2051
20,0	35	2151
21,0	35	2151
22,0	35	2550
23,0	35	2550
24,0	35	2675
25,0	35	2675
26,0	35	2825
27,0	35	2825
28,0	35	3050
29,0	35	3050
30,0	35	3175
31,0	35	3175
32,0	35	3326
33,0	35	3326
34,0	35	3500
35,0	35	3500
36,0	35	3975

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
37,0	35	3975
38,0	35	4250
39,0	35	4250
40,0	35	4674
41,0	35	4674
42,0	35	5051
43,0	35	5051
44,0	35	5535
45,0	35	5535
46,0	35	5950
47,0	35	5950
48,0	35	6275
49,0	35	6275
50,0	35	6700
51,0	35	6700
52,0	35	7150
53,0	35	7375
54,0	35	7599
55,0	35	7775
56,0	35	8049
57,0	35	8350
58,0	35	8550
59,0	35	8825
60,0	35	9074

Schnitttiefe / Cutting Depth 50mm

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
12,0	50	1996
13,0	50	1996
14,0	50	2401
15,0	50	2401
16,0	50	2401
17,0	50	2401
18,0	50	2401
19,0	50	2401
20,0	50	2401
21,0	50	2675
22,0	50	2675
23,0	50	3036
24,0	50	3036
25,0	50	3200
26,0	50	3200
27,0	50	3376
28,0	50	3376
29,0	50	3676
30,0	50	3676
31,0	50	3875
32,0	50	3875
33,0	50	4150
34,0	50	4150
35,0	50	4425
36,0	50	4425

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
37,0	50	5001
38,0	50	5001
39,0	50	5300
40,0	50	5300
41,0	50	5800
42,0	50	5800
43,0	50	6275
44,0	50	6275
45,0	50	6900
46,0	50	6900
47,0	50	7425
48,0	50	7425
49,0	50	7825
50,0	50	7825
51,0	50	8825
52,0	50	8825
53,0	50	9374
54,0	50	9374
55,0	50	9950
56,0	50	9950
57,0	50	10475
58,0	50	10475
59,0	50	11025
60,0	50	11025



Schnitttiefe
Cutting Depth
35 mm



Schnitttiefe
Cutting Depth
80 mm



Schnitttiefe
Cutting Depth
50 mm



Schnitttiefe
Cutting Depth
100 mm

Kernbohrer TCT

Core Drills TCT

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
12,0	35	3063
13,0	35	3063
14,0	35	3063
15,0	35	3063
16,0	35	3063
17,0	35	3063
18,0	35	3063
19,0	35	3063
20,0	35	3063
21,0	35	3063
22,0	35	3063
23,0	35	3063
24,0	35	3063
25,0	35	3063
26,0	35	3331
27,0	35	3331
28,0	35	3331
29,0	35	3331
30,0	35	3331
31,0	35	3956
32,0	35	3956
33,0	35	3956
34,0	35	3956
35,0	35	3956
36,0	35	4445
37,0	35	4445
38,0	35	4445
39,0	35	4445
40,0	35	4445
41,0	35	5579
42,0	35	5579
43,0	35	5579
44,0	35	5579
45,0	35	5579
46,0	35	6158
47,0	35	6158
48,0	35	6158
49,0	35	6158
50,0	35	6158
51,0	35	6957
52,0	35	6957
53,0	35	6957
54,0	35	6957
55,0	35	6957
56,0	35	7993
57,0	35	7993
58,0	35	7993
59,0	35	7993
60,0	35	7993

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
12,0	50	3578
13,0	50	3578
14,0	50	3578
15,0	50	3578
16,0	50	3578
17,0	50	3578
18,0	50	3578
19,0	50	3578
20,0	50	3578
21,0	50	3578
22,0	50	3578
23,0	50	3578
24,0	50	3578
25,0	50	3578
26,0	50	3919
27,0	50	3919
28,0	50	3919
29,0	50	3919
30,0	50	3919
31,0	50	4608
32,0	50	4608
33,0	50	4608
34,0	50	4608
35,0	50	4608
36,0	50	5263
37,0	50	5263
38,0	50	5263
39,0	50	5263
40,0	50	5263
41,0	50	6355
42,0	50	6355
43,0	50	6355
44,0	50	6355
45,0	50	6355
46,0	50	6833
47,0	50	6833
48,0	50	6833
49,0	50	6833
50,0	50	6833
51,0	50	7838
52,0	50	7838
53,0	50	7838
54,0	50	7838
55,0	50	7838
56,0	50	9042
57,0	50	9042
58,0	50	9042
59,0	50	9042
60,0	50	9042
61,0	50	10073
62,0	50	10073

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
63,0	50	10073
64,0	50	10073
65,0	50	10073
66,0	50	11954
67,0	50	11954
68,0	50	11954
69,0	50	11954
70,0	50	11954
71,0	50	13101
72,0	50	13101
73,0	50	13101
74,0	50	13101
75,0	50	13101
76,0	50	14095
77,0	50	14095
78,0	50	14095
79,0	50	14095
80,0	50	14095
81,0	50	16603
82,0	50	16603
83,0	50	16603
84,0	50	16603
85,0	50	16603
86,0	50	19612
87,0	50	19612
88,0	50	19612
89,0	50	19612
90,0	50	19612
91,0	50	21967
92,0	50	21967
93,0	50	21967
94,0	50	21967
95,0	50	21967
96,0	50	23961
97,0	50	23961
98,0	50	23961
99,0	50	23961
100,0	50	23961

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
18,0	80	6895
19,0	80	6895
20,0	80	6895
21,0	80	6895
22,0	80	6895
23,0	80	6895
24,0	80	6895
25,0	80	6895
26,0	80	7511
27,0	80	7511
28,0	80	7511
29,0	80	7511
30,0	80	7511
31,0	80	9065
32,0	80	9065
33,0	80	9065
34,0	80	9065
35,0	80	9065
36,0	80	10327
37,0	80	10327
38,0	80	10327
39,0	80	10327
40,0	80	10327
41,0	80	12499
42,0	80	12499
43,0	80	12499
44,0	80	12499
45,0	80	12499
46,0	80	14248
47,0	80	14248
48,0	80	14248
49,0	80	14248
50,0	80	14248
51,0	80	15920
52,0	80	15920
53,0	80	15920
54,0	80	15920
55,0	80	15920
56,0	80	17598
57,0	80	17598
58,0	80	17598
59,0	80	17598
60,0	80	17598
65,0	80	19258
70,0	80	20948
75,0	80	27251
80,0	80	28834
85,0	80	31414
90,0	80	33097
95,0	80	35512
100,0	80	38029

Ø	mm	₹
mm	Schnitttiefe Cutting Depth	Preis Price
18,0	100	8317
19,0	100	8317
20,0	100	8317
21,0	100	8317
22,0	100	8317
23,0	100	8317
24,0	100	8317
25,0	100	8317
26,0	100	9097
27,0	100	9097
28,0	100	9097
29,0	100	9097
30,0	100	9097
31,0	100	11107
32,0	100	11107
33,0	100	11107
34,0	100	11107
35,0	100	11107
36,0	100	12760
37,0	100	12760
38,0	100	12760
39,0	100	12760
40,0	100	12760
41,0	100	15451
42,0	100	15451
43,0	100	15451
44,0	100	15451
45,0	100	15451
46,0	100	17638
47,0	100	17638
48,0	100	17638
49,0	100	17638
50,0	100	17638
51,0	100	18182
52,0	100	18793
53,0	100	19464
54,0	100	20003
55,0	100	20569
56,0	100	21316
57,0	100	21862
58,0	100	22325
59,0	100	22720
60,0	100	23149
65,0	100	27051
70,0	100	30563
75,0	100	32253
80,0	100	34984
85,0	100	39064
90,0	100	45128
95,0	100	57873
100,0	100	61904

Mehrzweck-Lochsägen, HM Multi-Purpose Hole Saws TCT



Schnitttiefe
Cutting Depth
5 mm

Ø	₹	Ø	₹	Ø	₹	Ø	₹
mm	Preis Price	mm	Preis Price	mm	Preis Price	mm	Preis Price
14,0	1102	29,0	1433	44,0	2240	59,0	3250
15,0	1102	30,0	1433	45,0	2240	60,0	3250
16,0	1102	31,0	1671	46,0	2553	61,0	3819
17,0	1102	32,0	1671	47,0	2553	62,0	3819
18,0	1102	33,0	1671	48,0	2553	63,0	3819
19,0	1231	34,0	1671	49,0	2553	64,0	3819
20,0	1231	35,0	1671	50,0	2553	65,0	3819
21,0	1231	36,0	1847	51,0	2846	70,0	4131
22,0	1231	37,0	1847	52,0	2846	75,0	4444
23,0	1231	38,0	1847	53,0	2846	80,0	4792
24,0	1231	39,0	1847	54,0	2846	85,0	5380
25,0	1231	40,0	1847	55,0	2846	90,0	5766
26,0	1433	41,0	2240	56,0	3250	95,0	6041
27,0	1433	42,0	2240	57,0	3250	100,0	6463
28,0	1433	43,0	2240	58,0	3250		

Zubehör Accessories

Industrieraufnahmen mit automatischer Innenschmierung
Industrial arbor with automatic internal lubrication



Konus Tapershank	Für Kernbohrer For Core Drills	₹ Preis Price
MK 2	Weldon 19 mm	5202
MK 3	Weldon 19 mm	8645
MK 3	Weldon 32 mm	11169
MK 4	Weldon 32 mm	13737

Adapter
Adaptors



Adapter Adaptors	₹ Preis Price
Drill Chuck Adaptor ½"x20UNF	1150
Tapping Adaptor	1650

Schaft Adapter
Shank Adaptor



Adapter Adaptors	₹ Preis Price
Adaptor 19 to 32mm	2850
Adaptor 32 to 19mm	2850

Schaft Adapter
Shank Adaptor




Bezeichnung Description	Für Kernbohrer For Core Drills	Preis Price ₹
Adapter / Weldon 19 mm (3/4") Adaptor	Fein	4325
Adapter / Weldon 19 mm (3/4") Adaptor	Universal	4325

Pilot Pin
Pilot Pin



Adapter Adaptors	₹ Preis Price
Pilot Pin 6x35	275
Pilot Pin 6x50	275
Pilot Pin 8x35	275
Pilot Pin 8x50	325
Pilot Pin 8x80	325
Pilot Pin 8x100	450
Pilot Pin 8x150 Split Pin	1150
Pilot Pin 8x157 Split Pin	1190
Pilot Pin 8x168 Split Pin	1275

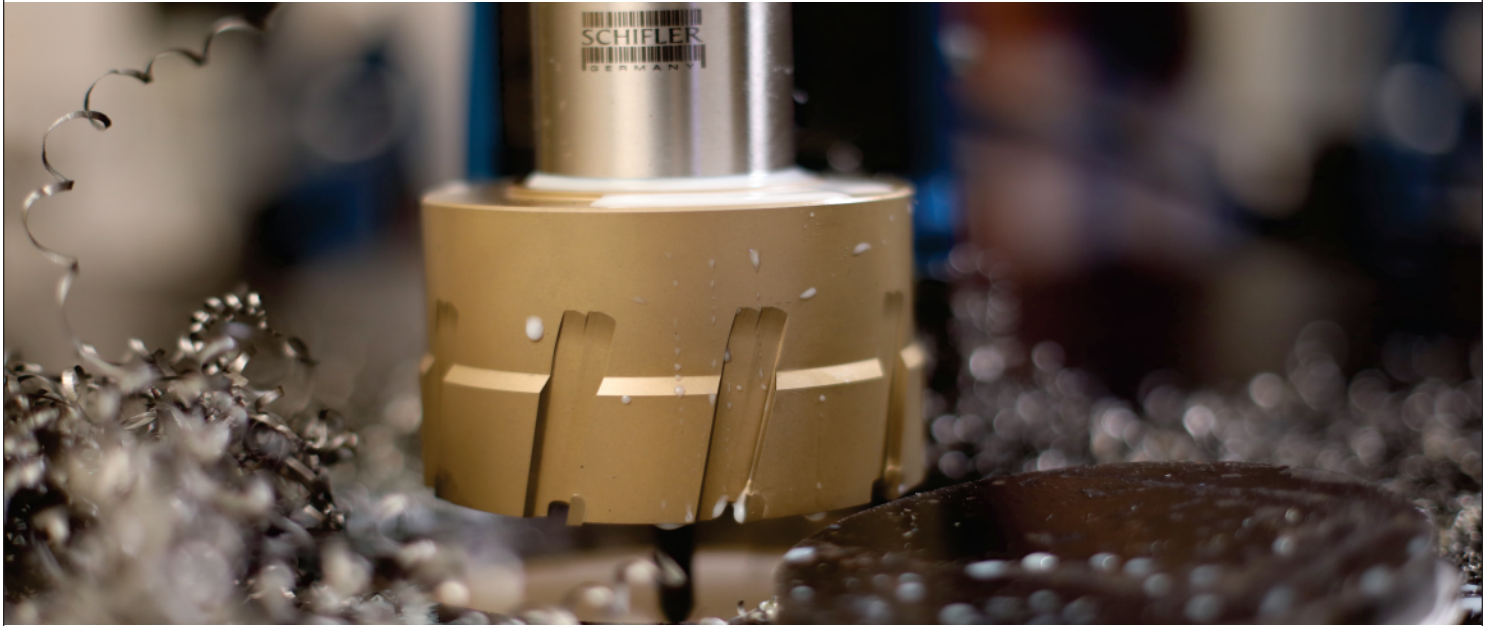

European Union

Schifler Werkzeuge & Co.
Bahnhofstraße. 8, 30159,
Hannover, GERMANY
Tel.: +49 (0) 511 93639 421
Fax.: +49 (0) 511 93639 300
Email: info@schifler.de

Middle East

Schifler Werkzeuge Middle East FZC
UAQ Free Trade Zone,
P.O. Box : 7073,
Umm Al Quwain, U.A.E.
Telefon : +971-568965572
Email : uae@schifler.de

Asia Pacific

Schifler Werkzeuge & Co.
B-24, Street No.9,
Anand Parbat Industrial Area,
Delhi-110005. INDIA
Telefon : 011-41044650
Email: india@schifler.de

www.schifler.de

